



SunRise LED Inc.[®]

Let SunRise *Light Up* Your Business

HERITAGE CLASSIC

High quality



ALFA-S SERIES



ALFA-S SERIES



- Power: 30W~360W
- Efficacy: 130~160lm/W
- Control: Photocell/Motion Sensor/DALI/LORA/PLC/D4i/1-10Vdimming
- Application: Street/Roadway/Parking lot/Area lighting
- Certificates: IP67/ UL/ CUL/ DLC/ LM79/ SAA/ ENEC
CB/ CE/ ErP/ RoHS/ PSE/ Ik10

APPLICATIONS



TECHNICAL PARAMETERS

Power	30-360W	IP Rating	IP67
Input	120-277VAC or 220-240VAC	SPD	Optional
PF	>0.95	Certificate/Qualification	UL/CUL/DLC/LM79/ROHS
THD	<20%	DALI	Optional
L70/L90	>200,000H/ > 60,000H	1-10V	Optional
Operating Temperature	-40°C~+50°C	Photocell	/
Efficacy	130-160LM/W	Smart Control	/
ANSI CCT	3000/4000/5000/5700K	Optic(IESNA)	Type I type II type III type IV type V
Min CRI	70/80/90CRI	Color Options	Grey/Black/Bronze/White

*Standard

ORDERING INFORMATION



MODEL (Nominal Power)	OPTIC LENS	CCT (ANSI)	OPTIONAL COLOR	LIGHTING CONTROL	ACCESSORY INFO
SHA30	SHA180	T2M	★ BK	00	Bird Spike
SHA60	SHA210	T3M	GR	Not required	10KA/20KA Surge
SHA90	SHA240	T3L	BZ	01	Protection Device
SHA120	SHA270	T4S	WH	Photocell	
SHA150	SHA300	T4M		02	Back Light Shield
SHB40	SHB200	T5V		Motion Sensor	
SHB80	SHB240	T5W		03	Safety Cable
SHB120	SHB280	T5S		Photocell	
SHB160	SHB320	T5M		+ Motion Sensor	
SHC50	SHC250	T5L		04	
SHC100	SHC300	T5X		DALI	
SHC150	SHC350	T5D		05	
SHC200				1-10V dimming	
SHD60	SHD240				
SHD120	SHD300				
SHD180	SHD360				

* DALI & Motion sensor unavailable

★ Regularly stocked item

※ Customization is available

ACCESSORIES OPTICS

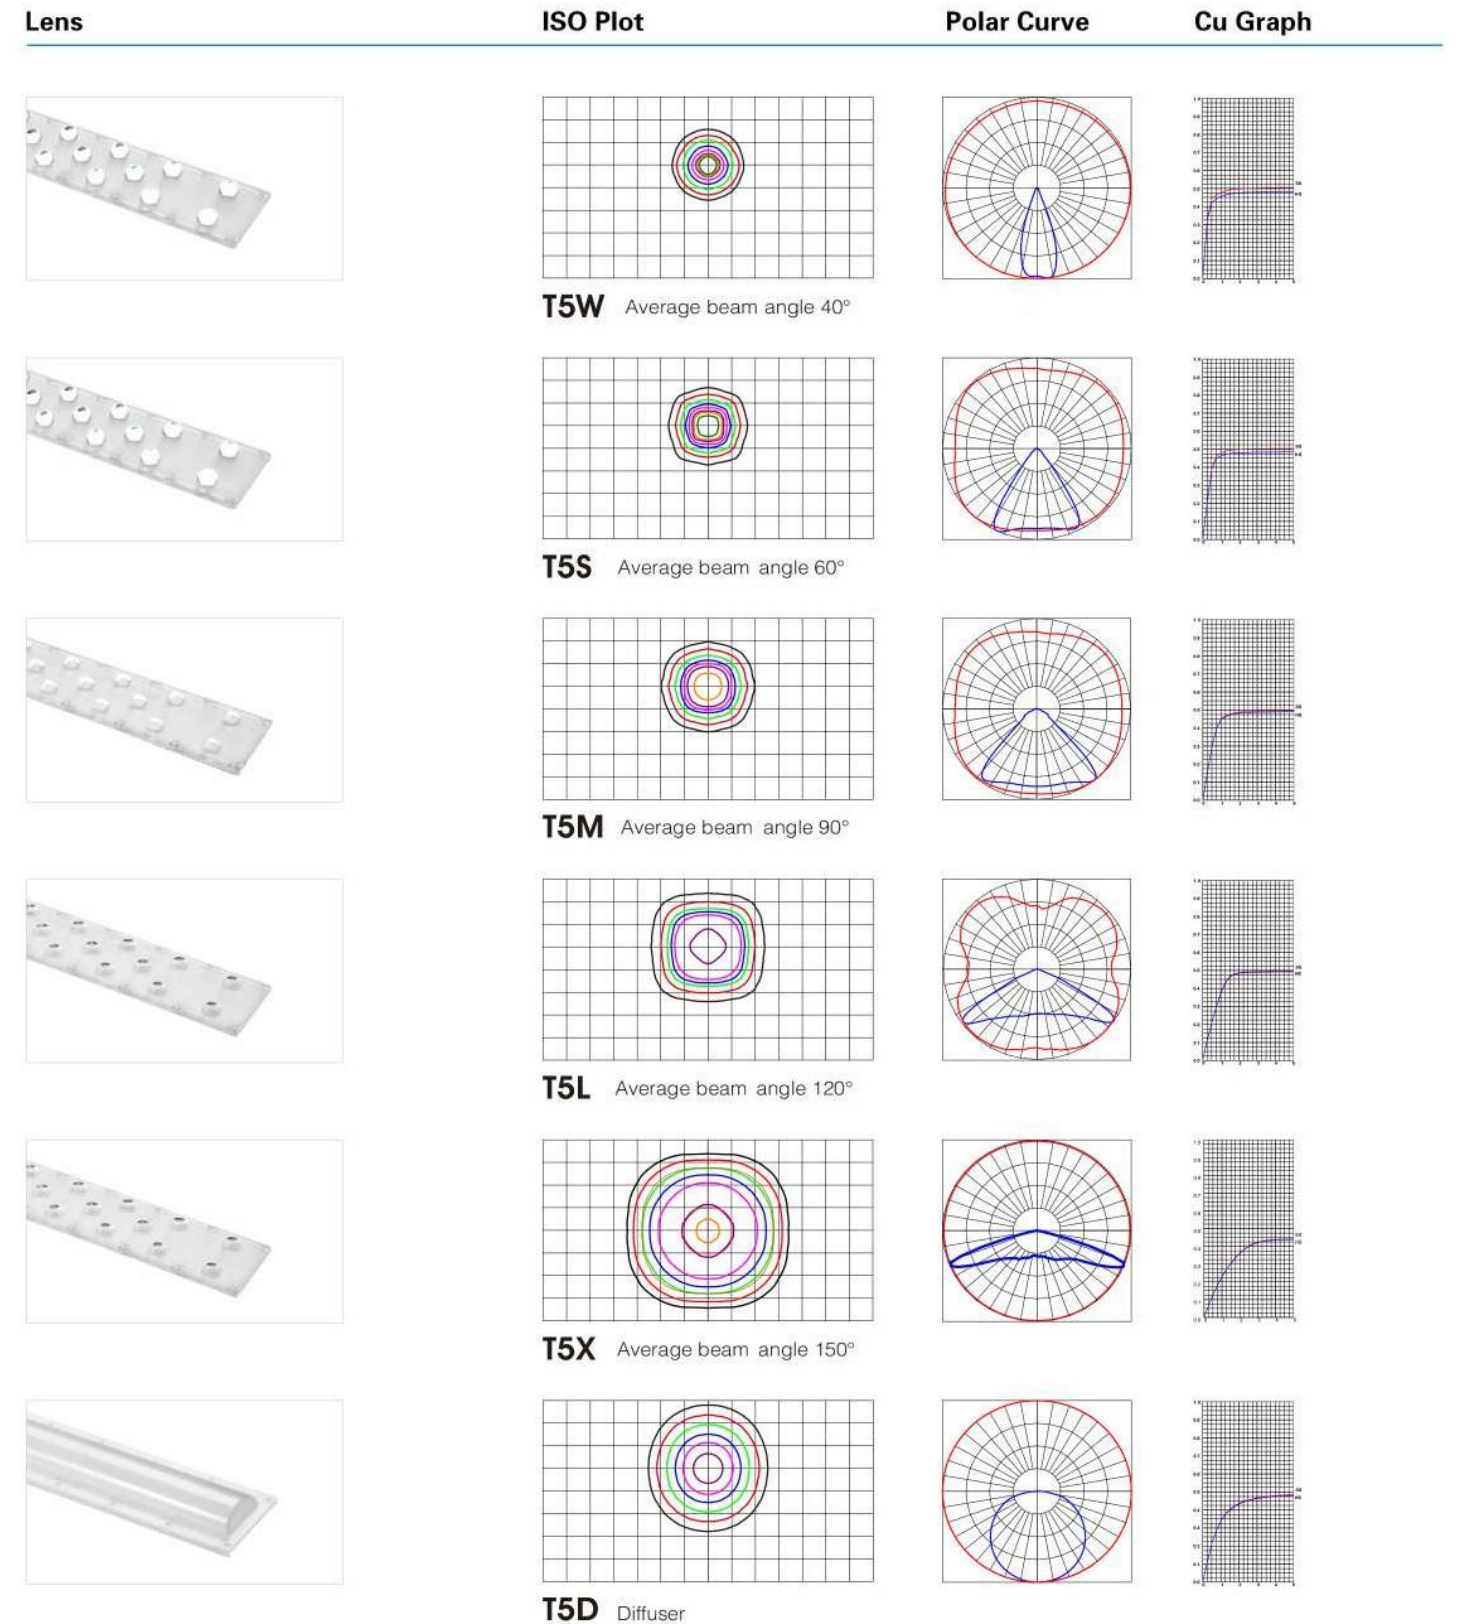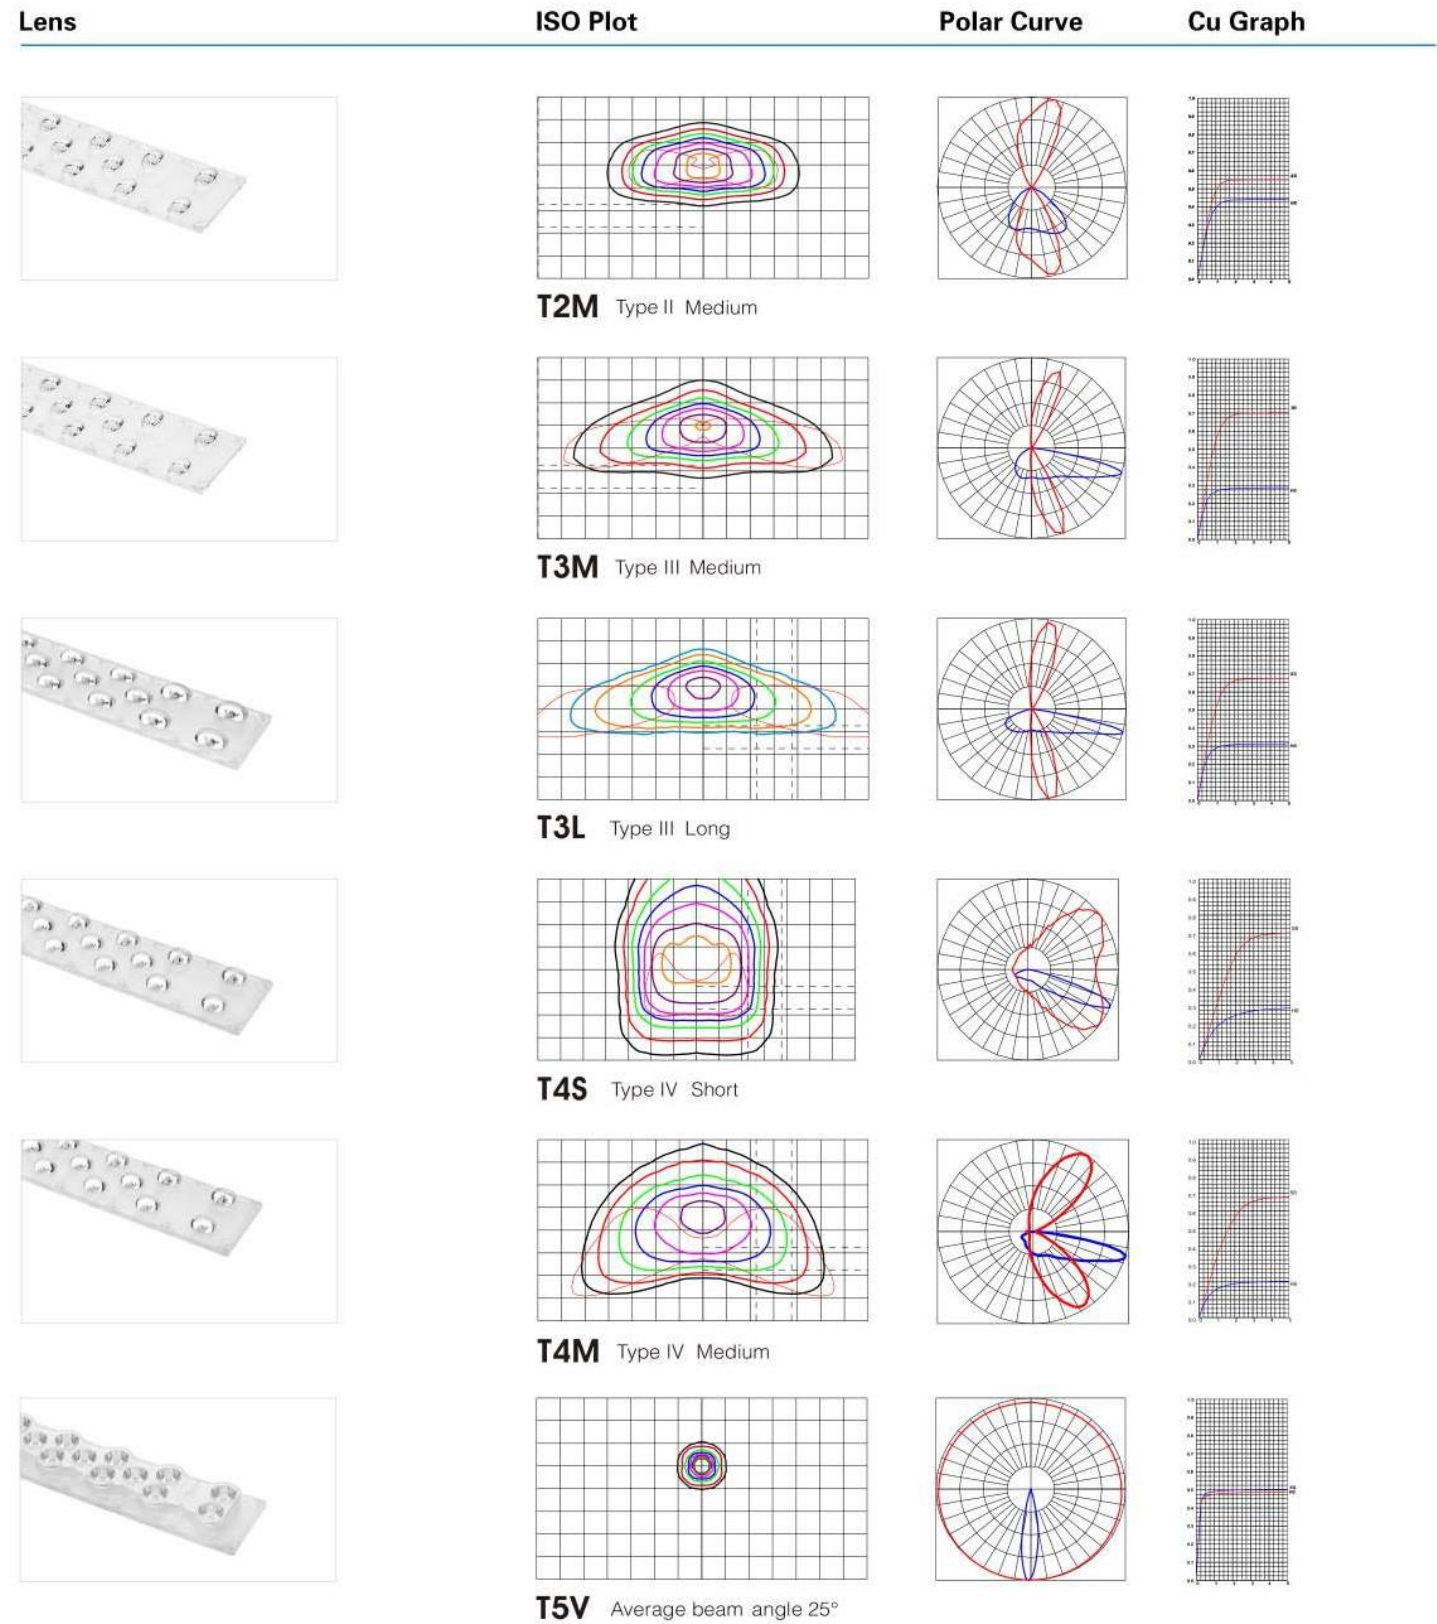

CUSTOMIZED SOLUTIONS

01.Safety Cable



02.Bird Spike



03.Pole Tenon Adaptor



04.Square Pole Adaptor



05.Left Throw & Right Throw Lens



06.Backlight Shield



07.3/5/7 -pin NEMA Receptacle+Shorting Cap/Photocell

